

Q-Aviation Lighting / Helipad Lighting / Q-Helipad Approach Light (FATO)

## Q-HELIPAD APPROACH LIGHT (FATO) TECHNICAL DETAILS



Application:	Helipad/Heliport
Classification:	Safe Area
Light Source:	LED, steady burning
Light Colour:	White, 6000K
Light Intensity:	55 cd
Vertical Beam Profile:	as per ICAO
Colour chromaticity:	as per ICAO, 6000K
Enclosure:	Aluminium, Powder coated
Mounting:	Frangible, 4 xM8
Input Voltage:	1) 100-240 Vac, 50-60 Hz 2) 24 Vdc
External Earthing:	up to 4mm <sup>2</sup>
Ambient Temp:	-25° to +65° C
In Compliance With:	ICAO, Annex 14 vol 2
Cable glands included:	2 x M25x1.5
Cable stops included:	1 x M25x1.5
Cable Outer Dimension:	11,1 - 20,0 mm
Consumption:	6 Watt
Life expectancy:	100.000+ hours
IP index:	IP 67
Weight:	2.40 kg.
Dimensions:	183x183x162 mm (LxWxH)
Packaging dimension:	200x200x200 mm (LxWxH)

### DESCRIPTION

The Q-Helipad Approach Light (FATO) is an ICAO compliance 55 cd approach light for all Helipad and Heliport facilities. The Q-Helipad Approach Light is available in several configurations such as 100-240 Vac and 24 Vdc.


### CERTIFICATES



### ORDER CODE

**Q22FR03** – Q-Helipad Approach Light (FATO)

- 11** Input power: 100-240 Vac
- 12** Input power: 24 Vdc

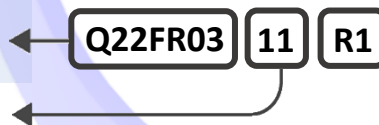

## MAIN DIMENSIONS

Find the main dimensions and mounting dimensions in the image below

